

## DS-72xxHQI-Kx(/P) Series TurboHD DVR

**TurboHD**<sup>™</sup>

- H.265+ / H.265 / H.264+ / H.264 and Dual-Stream Video Compression
- Support for HD-TVI and Analog Cameras
- Full Channel Recording at up to 2 MP
- Full Channel 1080p Real-Time Recording
- HDMI and VGA Output up to 3840 x 2160
- Long Over-the-Coax Transmission Distance
- Up to 16-ch Synchronous Playback Support

TurboHD DS-72xxHQI-Kx and DS-72xxHQI-Kx/P Series DVRs feature a range of self-adaptive signal inputs and offer camera support on up to 16 channels. They offer transmission distances of up to 2,630 ft (800m) on 1080p, and 3,940 ft (1,200m) on 720p HD-TVI. Hikvision's TurboHD DVRs also feature the latest H.265+ encoding technology, which improves recording efficiency and reduces data storage costs.

The DS-72xxHQI-Kx and DS-72xxHQI-Kx/P Series DVR supports advanced analytics, such as line crossing, intrusion, and scene change detection.

Additionally, all PoC (/P) models support Power over Coax (PoC) technology.


**Available models:** DS-7204HQI-K1, DS-7204HQI-K1/P, DS-7208HQI-K2, DS-7208HQI-K2/P, DS-7216HQI-K2, and DS-7216HQI-K2/P

# Specifications

	DS-7204HQI-K1 and DS-7204HQI-K1/P	DS-7208HQI-K2 and DS-7208HQI-K2/P	DS-7216HQI-K2 and DS-7216HQI-K2/P
<b>Video / Audio Input</b>			
Video Compression	H.265+ / H.265 / H.264+ / H.264		
Analog Video Input	4-ch	8-ch	16-ch
HD-TVI Input	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25 <b>Note:</b> The 3 MP signal input is only available for channel 1 of DS-7204HQI-K1/P, channel 1/2 of DS-7208HQI-K2/P, and channel 1/2/3/4 of DS-7216HQI-K2/P.		
AHD Input	1080p25, 1080p30, 720p25, 720p30		
HD-CVI Input	1080p25, 1080p30, 720p25, 720p30		
CVBS Input	PAL / NTSC		
PoC Camera Input (for PoC Models Only)	Supports Hikvision PoC Camera; <b>Note:</b> Do not unplug or plug the PoC camera if it is powered by the external power supply.		
IP Video Input	1-ch	2-ch	
	Up to 4 MP resolution Supports H.265+ / H.265 / H.264+ / H.264 IP cameras		
Audio Compression	G.711u		
Audio Input	1-ch, RCA (2.0 Vp-p, 1 kΩ)		
<b>Video / Audio Output</b>			
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480		
HDMI / VGA Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		<b>VGA:</b> 1-ch, 1920 × 1080 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz; <b>HDMI:</b> 1-ch, 4 K (3840 × 2160) / 30 Hz, 2 K (2560 × 1440) / 60 Hz, 1920 × 1080 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz
Encoding Resolution	When 1080p Lite mode not enabled: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF; When 1080p Lite mode enabled: 3 MP/1080p lite/720p lite/VGA/WD1/4CIF/CIF		
Frame Rate	Main stream: When 1080p Lite mode not enabled: For 3 MP stream access: 3 MP / 1080p / 720p / VGA / WD1 / 4CIF / CIF @ 15 fps; For 1080p stream access: 1080p / 720p @ 15 fps; VGA / WD1 / 4CIF / CIF @ 25 fps (P) / 30 fps (N); For 720p stream access: 720p / VGA / WD1 / 4CIF / CIF @ 25 fps (P) / 30 fps (N); When 1080p Lite mode enabled: 3 MP @ 15 fps/1080p lite / 720p lite / VGA / WD1 / 4CIF / CIF @ 25 fps (P) / 30 fps (N) Sub-stream: WD1 / 4CIF / CIF @ 25 fps (P) / 30 fps (N)		
Video Bit Rate	32 Kbps to 10 Mbps		
Audio Output	1-ch, RCA (Linear, 1 kΩ)		
Audio Bit Rate	64 Kbps		
Dual-Stream	Supported		
Stream Type	Video and audio		
Synchronous Playback	4-ch	8-ch	16-ch
<b>Network Management</b>			
Remote Connections	128		
Network Protocols	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF		
<b>Hard Disk</b>			
SATA	1 SATA interface	2 SATA interfaces	
Capacity	Up to 6 TB capacity for each disk		
<b>External Interface</b>			
Two-Way Audio Input	1-ch, RCA (2.0 Vp-p, 1 kΩ) (using the first audio input)		
Network Interface	1, RJ45 10M/100M self-adaptive Ethernet interface		1, RJ45 10M/100M/1000M self-adaptive Ethernet interface
Serial Interface	RS-485 (half-duplex)		
USB Interface	2 × USB 2.0		Front panel: 1 × USB 2.0; rear panel: 1 × USB 3.0
<b>General</b>			
Power Supply	12 VDC (non-PoC models), 48 VDC (PoC models)		
Consumption (without HDD)	≤ 40 W	≤ 60 W	≤ 120 W
Working Temperature	14° F to 131° F (-10° C to 55° C)		
Working Humidity	10 to 90 %		
Dimensions (W × D × H)	12.4" × 9.5" × 1.8" (315 mm × 242 mm × 45 mm)	15" × 12.6" × 1.9" (380 mm × 320 mm × 48 mm)	
Weight (without HDD)	≤ 2.6 lbs (1.16 kg)	≤ 3.9 lbs (1.78 kg)	≤ 4.4 lbs (2 kg)

# Physical Interfaces

DS-7216HQI-K2/P

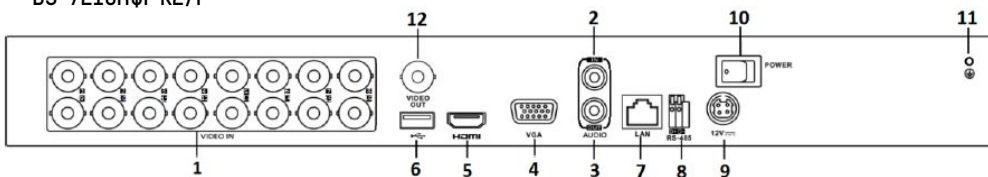

1. VIDEO IN	7. LAN Network Interface
2. AUDIO IN, RCA Connector	8. RS-485 Serial Interface
3. AUDIO OUT, RCA Connector	9. 48 VDC Power Input (12 VDC for non-PoC models)
4. VGA Interface	10. Power Switch
5. HDMI Interface	11. GND
6. USB Port	12. VIDEO OUT

**Note:** The DS-7204/7208HQI-Kx/P rear panel provides 4/8 video input interfaces