


DS-2CE56C5T-VFIT3

HD720p TurboHD Outdoor Varifocal EXIR Turret Camera




EXIR

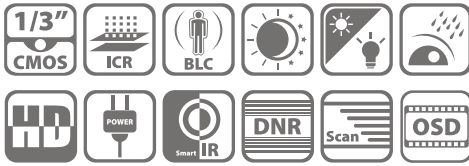

Key Features

- HD720p Video Output
- HD-TVI Standard Technology
- True Day/Night
- 2.8 mm to 12 mm Varifocal Lens
- OSD Menu, 3D DNR, Smart IR
- EXIR Technology, 50 Meters IR Distance
- Superior Low Light Performance
- Up-the-Coax (UTC) OSD Menu Control

Dimensions

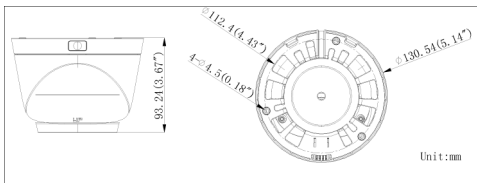

Accessories



Wall Mount:
WML + PC130T



Angled Base Mount
ABM



Video Balun
DS-1H18



Conduit Base
CBM

DS-2CE56C5T-VFIT3	
Camera	
Image Sensor	1/3" progressive scan CMOS
Signal System	NTSC
Effective Pixels	1280 x 720
Minimum Illumination	0.0014 lux @ (f/1.4, AGC on), 0 lux with IR
Shutter Speed	1/60 sec. to 1/50,000 sec.
Lens	2.8 mm to 12 mm, f/1.4 Angle of view: 78° to 28°
Lens Mount	φ14
Angle Adjustment	Pan: 0° to 355°, tilt: 0° to 90°, rotation: 0° to 355°
Day/Night	IR cut filter
Synchronization	Internal synchronization
Video Frame Rate	720p @ 60 fps
HD Video Output	1 analog HD output
CVBS Output	1 V p-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
Menu	
Automatic Exposure	Globe AE/DWDR
AGC	Low/middle/high/off
Slow Shutter	Supported
D/N Mode	Color/BW/SMART IR
White Balance	Auto/manual
3D DNR	Low/middle/high/off
Motion Detection	Supported, maximum 4 zones
Privacy Mask	8, selectable color or mosaic
UTC Function	Supported
Language	English
Functions	Digital wide dynamic range, 3D digital noise reduction, sharpness, brightness, digital zoom, mirror
General	
Working Temperature/ Humidity	-30° C to 60° C (-22° F to 140° F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Maximum 6 W
Weatherproof Rating	IP66
IR Range	Up to 50 meters IR range
Communication	Up-the-Coax
Dimensions	φ130.54 mm × 93.24 mm (φ5.14" × 3.67")
Weight	380 g (0.84 lb)

Order Models

DS-2CE56C5T-VFIT3