

## DS-2CD6626B/E-HIR Series

### 2 MP Outdoor Anti-Corrosion IR Network Bullet Camera

# DarkFighter™

- Darkfighter Ultra-Low Illumination Technology
- 316 L Stainless Steel Housing
- 1/1.8" Progressive Scan CMOS Sensor
- 120 dB WDR
- Full Smart Feature Set
- ISO C5-M, NEMA 4x Certification
- IR5: 3.8 to 16 mm VF Lens, 50 m IR Range
- IRA: 11 to 40 mm VF Lens, 100 m IR Range
- IP67 Certified
- 240 VAC (802.3at), 60 W Maximum



Hikvision DS-2CD6626B/E-H Network Bullet Cameras are a smart choice for difficult environmental conditions. They feature an IP67 anti-corrosion 316 L stainless steel housing that protects your camera from outside elements.


The bullet camera supports a full set of Hikvision proprietary Smart Features and is equipped with an IR lamp with a range of 328 ft (100 m), which facilitates nighttime recording.

#### Available models:

DS-2CD6626B/E-HIR5: 3.8 to 16 mm lens

DS-2CD6626B/E-HIRA: 11 to 40 mm lens

## Dimensions

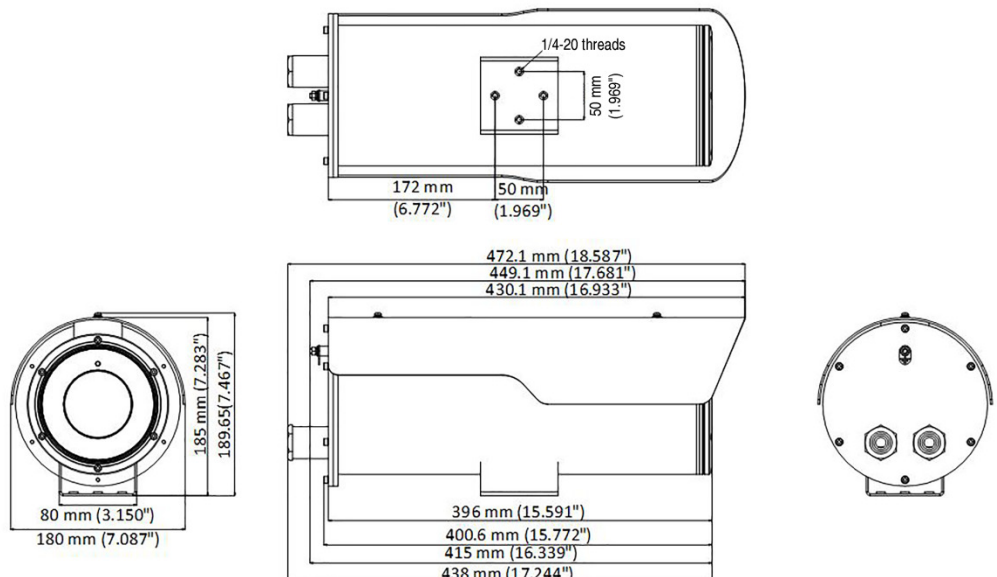

## Specifications

	DS-2CD6626B/E-HIR5	DS-2CD6626B/E-HIRA
<b>Camera</b>		
Image Sensor	1/1.8" progressive scan CMOS	
Minimum Illumination	Color: 0.002 lux @ (f/1.2, AGC on), B/W: 0.0002 lux @ (f/1.2, AGC on)	
Shutter Speed	1 s to 1/100,000 s	
Slow Shutter	Supported	
Lens	3.8 mm to 16 mm	11 mm to 40 mm
Day and Night	IR cut filter	
Digital Noise Reduction	3D DNR	
WDR	120 dB	
<b>Compression Standard</b>		
Video Compression	H.264/MJPEG/MJPEG4	
H.264 Encoding Level	Baseline profile/main profile/high profile	
Video Bit Rate	32 Kbps to 16 Mbps	
Audio Compression	G.711/G.722.1/G.726/MP2L2/PCM	
Audio Bit Rate	64 Kbps (G.711)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 128 Kbps (MP2L2)	
<b>Image</b>		
Maximum Resolution	1920 × 1080	
Frame Rate	50 Hz: 50 fps (1920 × 1080, 1280 × 960, 1280 × 720); 60 Hz: 60 fps (1920 × 1080, 1280 × 960, 1280 × 720)	
Third Stream	Independent with main stream and sub stream, up to: 50 Hz: 25 fps (1920 × 1080); 60 Hz: 30 fps (1920 × 1080)	
Image Settings	Rotate mode, saturation, brightness, contrast and sharpness are adjustable by client software or Web browser	
Backlight Compensation	Yes, zone optional	
Defog	Supported	
EIS	Supported	
Day / Night Switch	Auto, schedule, alarm trigger	
Picture Overlay	Support for 24-bit BMP image overlay, zone optional	
ROI	Up to 4 fixed areas in each stream or dynamic tracking	
<b>Network</b>		
Network Storage	Support for microSD/SDHC/SDXC slot (up to 128 GB); NAS (support for NFS, SMB/CIFS)	
Alarm Trigger	Tampering alarm, network disconnect, IP address conflict, storage full, storage error	
Smart Features	Behavior analysis, line crossing detection, intrusion detection, region entrance detection, unattended baggage, object removal, exception detection	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour	
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI, GB28181	
General Functions	One-key recovery, flash-prevention, three streams, heartbeat, mirror, password protection, video cover, watermark, IP address filtering, anonymous access	
<b>Interface</b>		
Audio Interface	1-ch 3.5 mm audio in (microphone in/line in)/output external interface	
Communication	1 10M/100M Ethernet port, 1 RS-485 port, 1 RS-232 interface	
Housing Interface	1 anti-corrosion inlet protected by a metal hose	
Alarm	1 input/1 output, up to 110 VAC (1 A) or 24 VDC (500 mA)	
<b>General</b>		
Operating Conditions	-40° to 140° F (-40° to 60° C), humidity 95% or less (non-condensing)	
Power Supply	24 VAC/PoE (802.3at)	
IR Range	164 ft (50 m)	328 ft (100 m)
Power Consumption	60 W maximum	
Dimensions	18.3" x 7.48" x 7.08" (465 mm x 189.7 mm x 180 mm)	
Weight	13.67 lbs (6.2 kg)	

## Accessories

